


Spiralite

Operation & Maintenance



Spiralite is a mineral wool board fire protection systems normally clad around steel beams and columns. They will appear yellow/green and will feel fibrous. They may be faced with a glass fibre tissue or a silver, white or black foil.

The Spiralite system provides fire protection up to two hours.

Spiralite is secured in place by spiral screws and noggins nails and Noggins

Reference should be made to TDS 180 Material Safety Data Sheet. This document provides relevant COSHH information

for handling etc.

The systems delay the effects of fire on the structure of the building in compliance with Building Regulations and fire

ratings. Any damage to or removal of the installed system will affect the fire integrity of the building and may put life

and property at unnecessary risk.

There are no running maintenance requirements.

The installation must not be disturbed, altered or removed. It must not be allowed to become deluged or over sprayed/

clad with other materials. Contractors working near or around the installation should be briefed not to remove or alter it.

We recommend regular inspections take place to ensure there has been no alteration or deterioration. Any damage must

be repaired immediately by an approved contractor.

Material Sizes

1200x2000x20mm

1200x2000x25mm


1200x2000x30mm

1200x2000x35mm

1200x2000x40mm

1200x2000x45mm

1200x2000x60mm

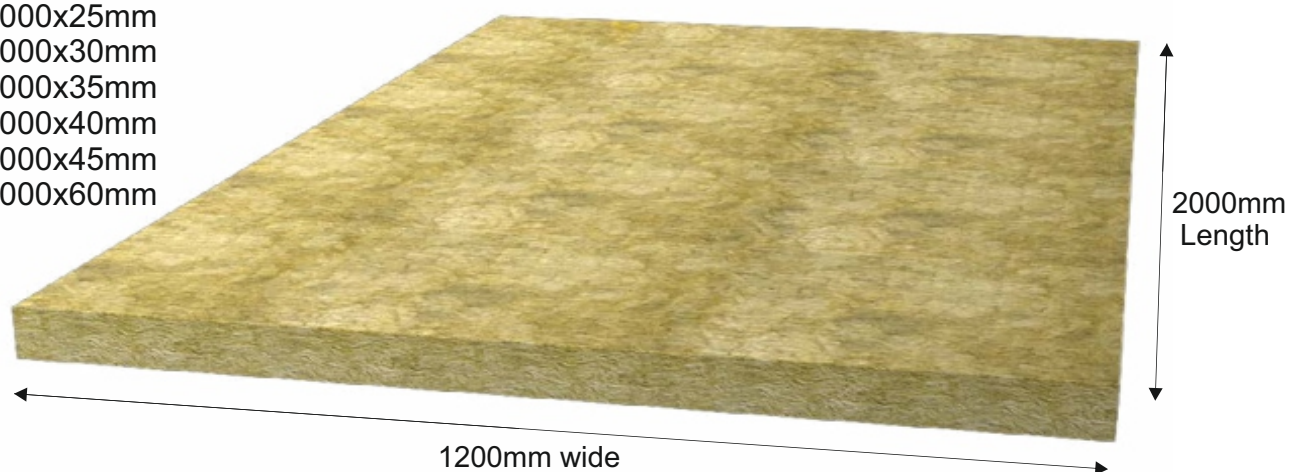

The information contained in Cryotherm data sheet is believed correct at the time of publication. Whilst we will endeavour to the keep our publications up to date., readers will appreciate that between publication there may be pertinent in the law, or other development affecting the accuracy of the information provided.

Date of this revision:01/01/2026

Cryotherm Insulation Ltd, Hirst Wood Road, Shipley, West Yorkshire, BD18 4BU

Tel: 01274 589175 / Email: enquiries@cryotherm.co.uk / www.cryotherm.co.uk